
ASSEMBLY INSTRUCTIONS

Wall Cabinet Assembly Instructions:


Supplied Parts List:

- -ASide Panel (Left)
- -®Back Panel
- Side Panel (Right)
- -D Door
- (Similar)
- (C) (2-3) Adjustable Shelves



Assembled Cabinet

Drawing Not to Scale

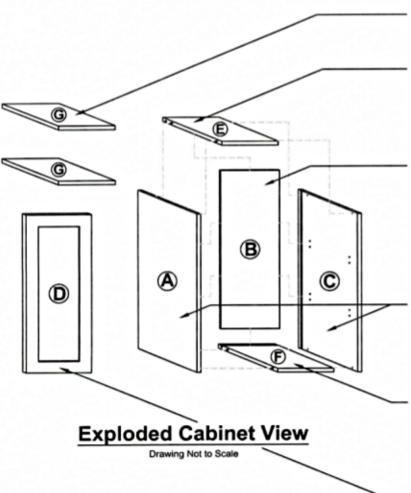

(2-3) Adjustable Shelves. To Be Installed After Assembly and Installation of Finished Cabinet.

Top Panel (Similar to Bottom Panel). Dado Cut Channel (Denotes Rear of Cabinet) to Face Interior of Cabinet. Panel to be Married to Side Panel(s) Using (2) Pre-Installed Dowels, Carpenter Glue, and (Min.) 1 ½ Brad Nails @ 6" o.c. (Typ.).

Back Panel. Smooth Side of Panel to Face Interior of Cabinet. To Be Installed After Top and Bottom Panel(s) Have Been Married to Side Panel and Bead of Carpenter Glue Applied to Top, Bottom, and Side Panel(s) Dado Cut Channel(s). (Press Panel Towards Interior or Face of Cabinet When Applying (Min.) 1 18 Brad Nails @ 6" o.c. (Typ.) Around Perimeter of Assembled Cabinet.)

Side Panel(s). Dado Cut Channel (Denotes Rear of Cabinet), and Pre-Drilled Side to Face Interior of Cabinet. After Being Fit to Top, Back, and Bottom Panel, Nail Pre-Glued Married Joints Using (Min.) 1 1 1 1 Brad Nails @ 6 o.c. (Typ.).

Bottom Panel (Similar to Top Panel). Dado Cut Channel (Denotes Rear of Cabinet) to Face Interior of Cabinet. Panel to be Married to Side Panel(s) Using (2) Pre-Installed Dowels, Carpenter Glue,and (Min.) 1 ½ Brad Nails @ 6" o.c. (Typ.).

Door. To Be Installed After Assembly and Installation of Cabinet Using Supplied Hinge Hardware to Finish Cabinet.